# ICEMATIC

ALMOND

# A250 F

**250** Kg/24h

**Machines à glace en écailles / Scale ice makers**

A250 F - A400 F - A600 F - A950 F - A1500 F

A250 F

230V/1N/50Hz

**Glace en écailles**

## CARACTÉRISTIQUES

- Construction en acier inox
- Condensation à air
- Évaporateur cylindrique et vertical à fort échange thermique
- Bouton ON/OFF sur la machine
- Glace sous-refroidie à -7°C à écailles, les plus froides et sèches, avec une grande surface de contact pour un refroidissement rapide des aliments.
- Energy Saving : les matériaux de construction de notre évaporateur cylindrique sont à haute conductivité thermique, pour une meilleure efficacité et une économie de consommation d'énergie.
- Manutention réduite : l'évaporateur cylindrique est fixe, il ne tourne pas sur son essieu, donc les problèmes de pertes de gaz se réduisent sensiblement. Toutes les parties internes où la glace se forme sont facilement accessibles, pour faciliter le nettoyage de la machine.



## TYPE GLACE / ICE TYPE



ÉPAISSEUR ÉCAILLES
SCALE THICKNESS

0,9-1,2 mm

## OPTIONS

- Voltages spéciaux sur demande

## BAC DE STOCKAGE / SLOPE BIN

MG505 MC320 MC620
MB500 MB700 MB1000

## PRODUCTION GLACE / ICE PRODUCTION

kg/24h
*lbs/24h*

Condensation à Air
Air Cooled Unit

| Témp. Air<br>Air Temp. | Témp. Eau / Water Temp. | | | |
|---|---|---|---|---|
| °C<br>°F | 30°<br>86° | 25°<br>77° | 20°<br>68° | 15°<br>59° |
| **15°** | **198** | **228** | **243** | **250** |
| *59°* | *436* | *503* | *536* | *551* |
| **20°** | **183** | **205** | **240** | **248** |
| *68°* | *403* | *452* | *529* | *547* |
| **25°** | **174** | **193** | **219** | **226** |
| *77°* | *383* | *425* | *483* | *498* |
| **30°** | **159** | **168** | **186** | **203** |
| *86°* | *350* | *370* | *410* | *447* |

## FEATURES

- Stainless steel construction
- Air condensation
- Fixed vertical evaporator cylinder with high thermal excange
- ON-OFF controls on board the machine
- Ice flakes cooled to -7°C with a large contact surface, white, pure, dry, with excellent capacity for rapid cooling of food and easy drainage.
- Save Energy: the evaporator cylinder is made of materials with high heat conductivity, which allows better efficiency and more energy saving.
- Minimum maintenance: the evaporator cylinder is fixed and does not turn on its axis, so there are no gas leak issues or high maintenance costs. All the parts inside the ice forming area are easy to clean.

## DIMENSIONS

L x P x H (mm)

1015 x 590 x 815

1300 x 850 x 1200

## VOLTAGE

230/50/1


## OPTIONAL

- Special voltages, on request

## GAS

R452A
GWP=2141
Ton CO2 : 1,93

## INTERFACE

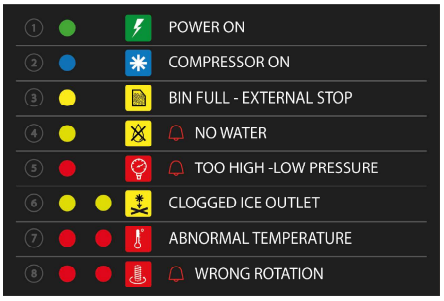


Led de signalisation
Signal Led

## DONNÉES TECHNIQUES / TECHNICAL DATA

| | | | cond | comp. W | ABS. W | Fuse | l / h | kg | kg |
|---|---|---|---|---|---|---|---|---|---|
| A250 F | 230/50/1 | | | 1162 | 1090 | 10 | 7.8 | 170 | 200 |


Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

# ICEMATIC

ALMOND

# A250 F

**250** Kg/24h

**Machines à glace en écailles / Scale ice makers**


A250 F - A400 F - A600 F - A950 F - A1500 F

A250 F

230V/1N/50Hz


**Glace en écailles**

## DIMENSIONS

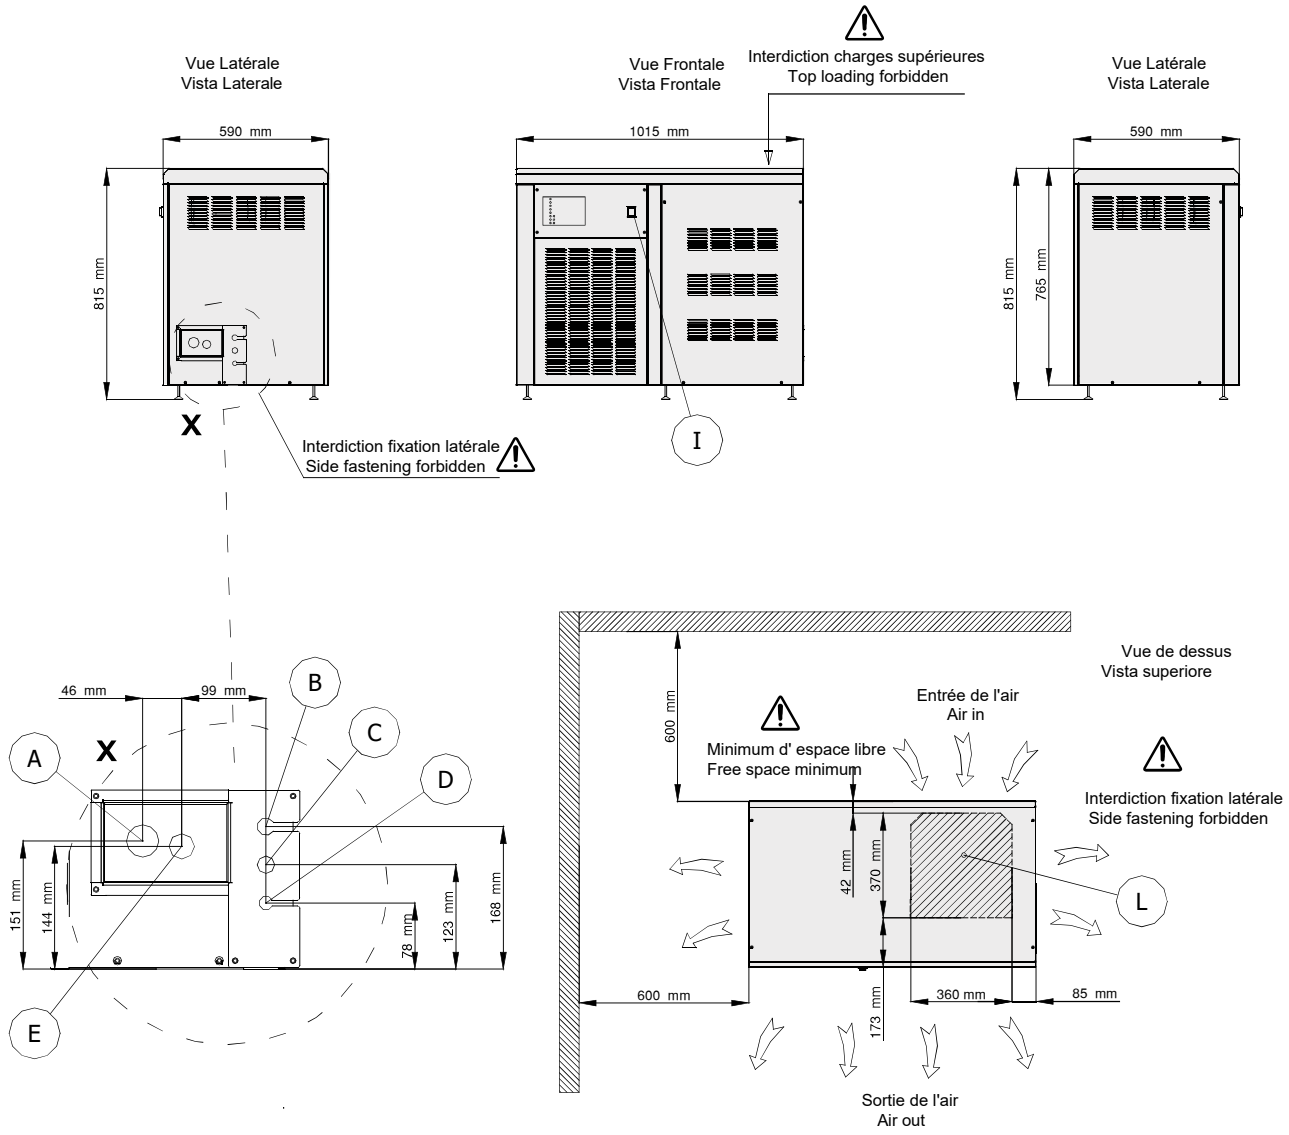


- A Ingresso acqua 3/4" - Water inlet 3/4"
- B Uscita comando remoto / Remote control outlet
- C Ingresso caso di tensione / Voltage cable inlet
- D Uscita per fotocellula / Outlet for photocell
- E Scarico acqua / Water discharge
- I Interruttore ON-OFF / ON-OFF Switch
- L Area caduta ghiaccio / Ice drop area

Rajuster à "bulle/niveau".
Adjust using "spirit level".

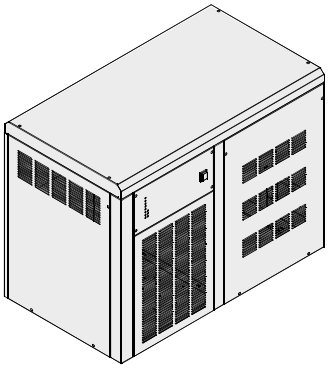

## CONDITIONS DE TRAVAIL - OPERATING REQUIREMENTS

| | Min. | Max |
|---|---|---|
| Témp. Ambiante / Air Temperature | 10°C | 35°C |
| Témp. Eau / Water Temperature | 5°C | 30°C |
| Press. eau / Water Pressure | 1 bar (14psi) | 5 bar (70psi) |
| Conductivité eau / Water conductivity | 30 µS | 500 µS |
| Voltage / Electrical supply | -10% | +10% |


Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu