# ICEMATIC

MANGO

# MG

## 129 → 478 Kg

Depositi ghiaccio / Slope bins storage:
MG105 - MG155 - MG205 - MG255 - MG305 - MG405 - MG505

Slope bins
Storage
Ice handling system

## CARATTERISTICHE

- Nuovo elegante, stile contemporaneo.
- Una combinazione perfetta per le macchine del ghiaccio modulari e le altre macchine Icematic.
- Paletta ghiaccio incorporata, e trattamento Antibatterico Microban per una migliore sanitizzazione.
- Isolamento poliuretanico ad alta densità.
- Deposito interno in polietilene lineare, per la massima compatibilità con gli alimenti e raggiata per agevolare la pulizia, inoltre è resistente ai graffi causati dal prelievo del ghiaccio.
- Parte frontale e perimetrale del deposito in acciaio, e sportello accesso ghiaccio resistente agli urti in plastica ottenuta con tecnologia rotocast.
- Regolazione piedini da135 mm a 185 mm.
- Deposito con ruote, disponibile su richiesta.
- Guarnizione sportello ghiaccio totalmente removibile e che isola riducendo lo scioglimento del ghiaccio, facilmente asportabile e pulibile.
- Scarico del deposito con tubo ruotabile di 360°, di facile connessione con ogni scarico a pavimento.



## FEATURES

- New sleek, contemporary styling.
- A perfect match to Modular ice machine and other Icematic Ice Machines.
- Scoop incorporates, antimicrobial Microban for better sanitation.
- Polyurethane Insulation, high density.
- Polyethylene bin interior, is sanitary and easy to clean, and resist scratches and scuffs from ice scoops.
- Stainless steel bin exterior, robust door frame will resist operational abuse (rotocast tecnology).
- Adjustment of feet from 135 mm to 185 mm.
- Bin Caster availaible on request.
- Fully removable door gasket seals door opening to reduce ice melt, easily disassembled for manual cleaning.
- Storage bin base drain tube conveniently rotates at 360° radius to allow ease-of-connection with any floor water drain position.

| Mod. | Volume interno<br>Internal Volume | Max Capacità ghiaccio<br>Max Ice Capacity | | Dimensioni (LPH)<br>Dimension (WDH) | Peso netto<br>Net Weight | Peso lordo<br>Gross Weight | Dati spedizione<br>Shipping data |
|---|---|---|---|---|---|---|---|
| **MG105** | 0,264 $m^3$ | 129 Kg* | 101 Kg** | 568 x 848 x 1048 mm | 36 Kg | 50 Kg | 620 x 885 x 1060 mm<br>50 kg ca. |
| **MG125** | 0,250 $m^3$ | 123 Kg* | 96 Kg** | 769 x 850 x 800 mm | 36 Kg | 50 Kg | 620 x 885 x 1060 mm<br>50 kg ca. |
| **MG155** | 0,340 $m^3$ | 168 Kg* | 132 Kg** | 568 x 880 x 1270 mm | 48 Kg | 62 Kg | 620 x 940 x 1310 mm<br>62 kg ca. |
| **MG205** | 0,368 $m^3$ | 181 Kg* | 141 Kg** | 768 x 848 x 1048 mm | 43 Kg | 56 Kg | 822 x 885 x 1080 mm<br>56 kg ca. |
| **MG255** | 0,496 $m^3$ | 243 Kg* | 191 Kg** | 770 x 880 x 1270 mm | 55 Kg | 70 Kg | 830 x 950 x 1310 mm<br>70 kg ca. |
| **MG305** | 0,513 $m^3$ | 252 Kg* | 197 Kg** | 1081 x 824 x 968 mm | 48 Kg | 63 Kg | 1140 x 910 x 960 mm<br>63 kg ca. |
| **MG405** | 0,830 $m^3$ | 406 Kg* | 319 Kg** | 1235 x 873 x 1270 mm | 73 Kg | 97 Kg | 1300 x 940 x 1310 mm<br>97 kg ca. |
| **MG505** | 0,970 $m^3$ | 478 Kg* | 375 Kg** | 1331 x 880 x 1270 mm | 77 Kg | 100 Kg | 1390 x 940 x 1310 mm<br>100 kg ca. |

* : Capacità "Application" calcolata sul 90% del volume totale in metri cubi moltiplicato per 545 kg/m3 / Application capacity is calculated on 90% of total volume in the cubic feet x 34 lb/ft3 - 545 kg/m3

** : Capacità "AHRI" calcolata sull'80% del volume totale in metri cubi moltiplicato per 481 kg/m3 / AHRI capacity is calculated on 80% of total volume in the cubic feet x 30 lb/ft3 - 481 kg/m3

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

# ICEMATIC

MANGO

MG

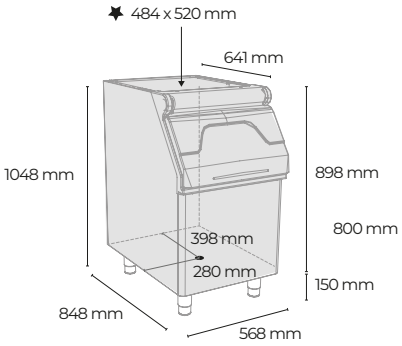
## 129 → 478 Kg

Depositi ghiaccio / Slope bins storage:
MG105 - MG155 - MG205 - MG255 - MG305 - MG405 - MG505

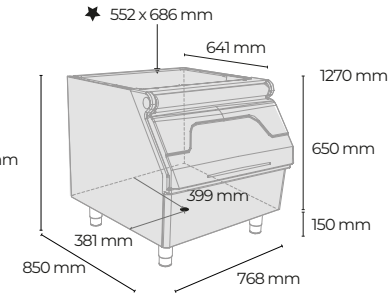
Slope bins
Storage
Ice handling system

## DIMENSIONI - DIMENSIONS

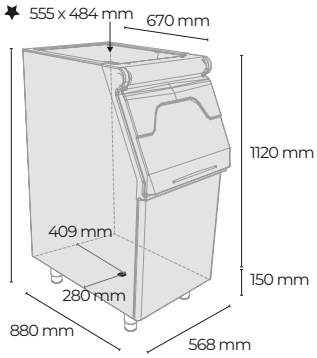
### MG 105



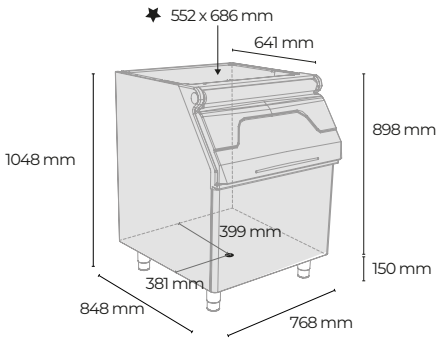

### MG 125



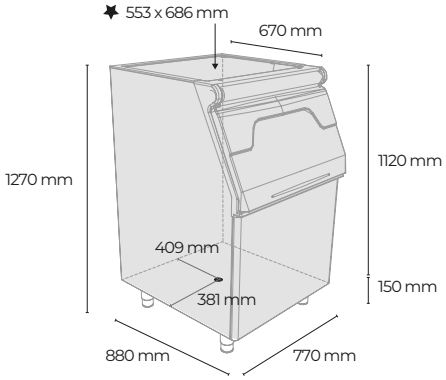

### MG 155



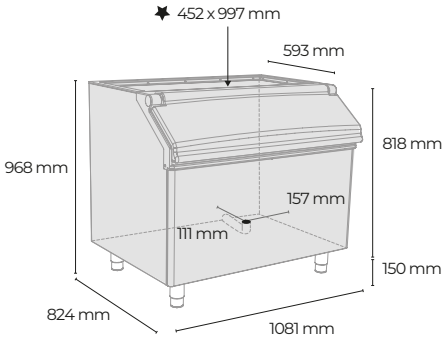

### MG 205



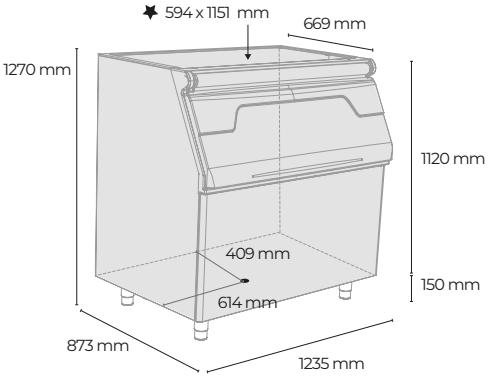

### MG 255



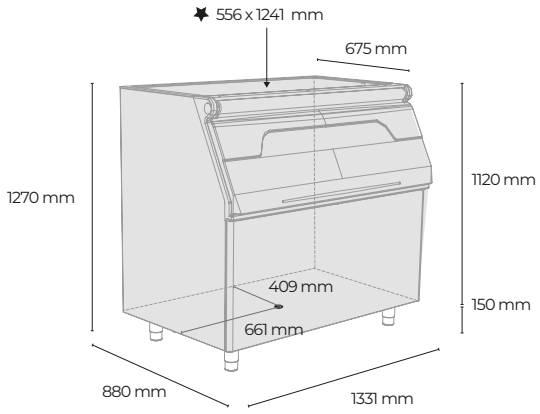

### MG 305




### MG 405




### MG 505




| Mod. | Produttori Ghiaccio<br>Ice Machines | Adattatore<br>Adapter |
|---|---|---|
| MG105 | M145F/M195F/M145/M195 | |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KBD105-155* |
| MG155 | M145F/M195F/M145/M195 | |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KBD105-155* |
| MG125 | M145F/M195F/M145/M195 | *KM205-255* |
| | M205F/M305F/M405F/M505F/M205/M305/M405 | *KM305* |
| MG205 | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KB205-255* |
| | B305S F/B305S /G305SF/G305S | *KB205-255* |
| MG255 | M145F/M195F/M145/M195 | *KM205-255* |
| | M205F/M305F/M405F/M505F/M205/M305/M405 | |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KB205-255* |
| | B305S F/B305S /G305SF/G305S | *KB205-255* |
| MG305 | M205F/M305F/M405F/M505F/M205/M305/M405 | *KM305* |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KB305* |
| | B305S F/B305S /G305SF/G305S | *KB305* |
| MG405 | M205F/M305F/M405F/M505F/M205/M305/M405 | *KBM405* |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KBM405* |
| | B305S F/B505F/B305S/B505 /G305SF/G305S/G505F/G505 | *KBM405* |
| MG505 | M205F/M305F/M405F/M505F/M205/M305/M405 | *KBM505* |
| | B125F/B165F/B205F/B125/B165/B205 G125F/G165F/G205F/G125/G165/G205 | *KBM505* |
| | B305S F/B505F/B305S/B505 /G305SF/G305S/G505F/G505 | *KBM505* |

Area caduta ghiaccio / Ice drop area

Piedi regolabili 130-185 mm / Adjustable legs 5 2/16"-7 4/16"
Scarico deposito diametro 20 mm / Discharge bin water diameter 12 /6"


Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu